

HYDRAULIC CREANE


Tension HYDRAULIC Cranes



Description:

Demountable cranes available in 0.5–3 ton capacity. Equipped with single or double acting pump, chrome-plated piston, overload safety valve, and dead man controls. Models 0.5–1 ton have nylon wheels; 1.5–2 ton with Vulkollan wheels. The 3-ton model is designed for unloading power units from trucks.

Tension Cranes

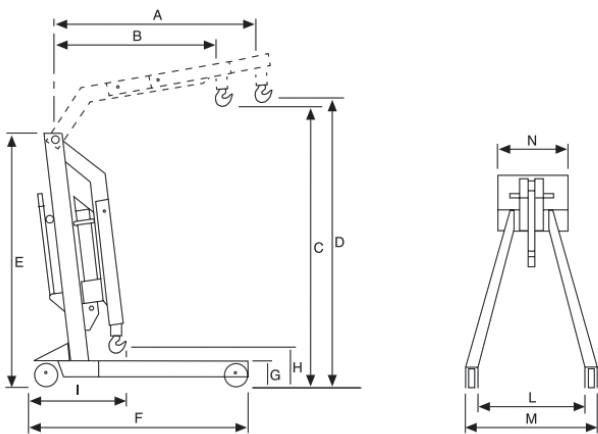

PRODUCT CODE	Capacity [ton]	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]	H [mm]	I [mm]	L [mm]	M [mm]	N [mm]	Wiegth [kg]
MGS-5	0.5	1620	1260	1350	1040	143	410	650	2160	2360	750	885	665	77
MGS-10	1.0	1620	1260	1350	1040	143	410	650	2160	2360	750	885	665	77
MGS-5D	0.5	1750	1520	1510	1210	170	450	670	2100	2250	930	1060	750	95
MGS-10D	1.0	1750	1520	1510	1210	170	450	670	2100	2250	930	1060	750	95
MGS-15D	1.5	1885	1800	1820	1370	200	600	850	2750	3100	835	1050	1000	171
MGS-20D	2.0	1960	2000	1920	1470	240	650	900	2800	3145	985	1200	1150	211
MGS-30D	3.0	2150	2270	2280	1790	265	510	780	3300	3730	1170	1420	1400	480